


## 2.4 RAIN WATER REUSE EQUIPMENT

Rain water treatment equipment, brand Salher composed with:

- Compact structure, Salher brand, with hydraulic and electric interconnection of the elements:
  - 1 filtration system with automatic cleaning.
  - 1 disinfection system:
    - Membrane dosing pump, electromagnetic activation.
    - Cylindrical storage tank with a capacity of 120 liters for product mix.
    - 1 level probe for tank.
    - Accessories kit composed of: dual ball check valve filter, injection pipe with dual ball check valve, 2 m suction pipe PVC-Glass, 4 m impulse pipe in polyethylene, ankle, screws and fuse.
    - 1 manual test equipment: chlorine – pH.
  - 1 flowmeter.
- Recirculating pump with floating suction (for submerged installation) and level regulator.
- 1 panel board for protection and operation.

REF:SAL-PLU

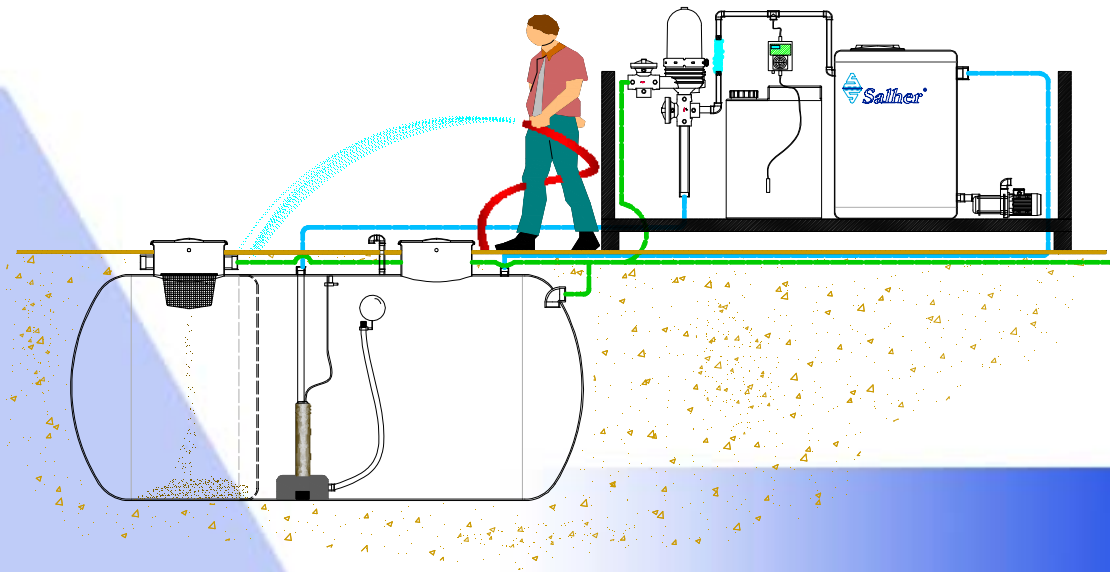

REF.	STRUCTURE DIMENSIONS (AxLxH)	STRUCTURE WEIGHT (Kg)	REUSE FLOW (m³/H)
SAL-PLU -2.0- ENT	1.0 x 1.0 x 1.80	80	2.5
SAL-PLU - 5.0- ENT	1.0 x 1.4 x 1.80	300	5.0
SAL-PLU -10.0- ENT	1.0 x 1.4 x 1.80	300	10.0
SAL-PLU -20- ENT	1.0 x 1.4 x 1.80	300	20.0

Optional: Rough water reception tank and treated water storage tank  
 (See REF: RAP02, p.26)